

Quattro Jump

Type 9290BD

Portable Force Plate System

Leg performance is a determinant factor for success in most sports. A mixture of explosive force, endurance and coordination is trained and very carefully optimized for each particular sports type.

Quattro Jump provides an objective measurement of force, power and jump height. A special protocol developed by Prof. Carmelo Bosco allows the quantification of leg performance.

- Objective measurement of jump force, jump height and jump power
- Immediate feedback to optimize the training program
- Rugged and accurate Kistler force plate technology. Portable thanks to lightweight sandwich design


Description

Quattro Jump consists of a portable Kistler force plate on which different jump types are performed. The force plate measures the vertical jump force which is analyzed with the computer connected to the system.

Kistler force plates are a worldwide standard in biomechanics and sports science since 40 years.

Requirements for the PC

- Operating System: Windows® XP, Windows® Vista or Windows® 7
- Acrobat® Reader® for reading the PDF Instruction Manual
- Intel Pentium 4 class processor (1 GHz or higher recommended)
- 2 GB of RAM minimum
- Video display set to at least 800x600, 256 colors, small fonts selected
- Disk (free) space required: 125 MB in the target directory for data storage and software installation
- Microsoft compatible mouse
- Windows® Installer version 1.1 or later
- One (1) direct serial port (RS-232C) or USB to serial port adapter
- A color printer is recommended for creating hard copies of graphs

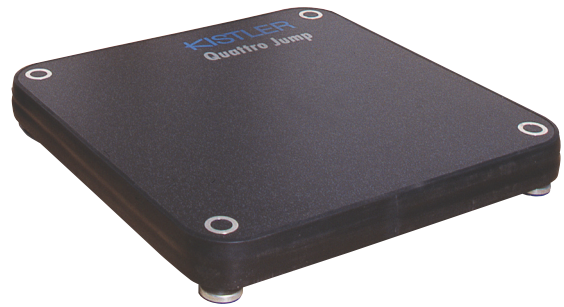

Technical Data

Dimensions of the force plate	mm	920x920x125
Range	F _z kN	0 ... 10
Overload	F _z kN	15
Linearity	%FSO	<±0,5
Hysteresis	%FSO	<1
Natural Frequency	Hz	≈150
Operating temperature range	° C	0 ... 50
Weight	kg	21,6
Sampling rate	Hz	500
Resolution		
Range 1	N/bit	1
Range 2	N/bit	0,2
Interface to the computer		
Connector type		USB
Power supply via USB	V	5

Conforms with the provisions of directive 86/336/EG in accordance with the CE Declaration of Conformity.

Windows® is a registered trade mark of Microsoft Corporation.
Adobe® Acrobat® Reader® is a registered trade mark of Adobe.


This information corresponds to the current state of knowledge. Kistler reserves the right to make technical changes. Liability for consequential damage resulting from the use of Kistler products is excluded.

©2012, Kistler Group, Eulachstrasse 22, 8408 Winterthur, Switzerland
Tel. +41 52 224 11 11, Fax +41 52 224 14 14, info@kistler.com, www.kistler.com
Kistler is a registered trademark of Kistler Holding AG.

Quattro Jump Software

The Quattro Jump Software is dedicated for routine jump performance measurement. It is therefore very easy to use. After every jump the protocol on the right side of the screen is updated. The best jump is highlighted.


The control area on the left side of the screen allows the user to delete or temporarily hide jumps from the protocol.

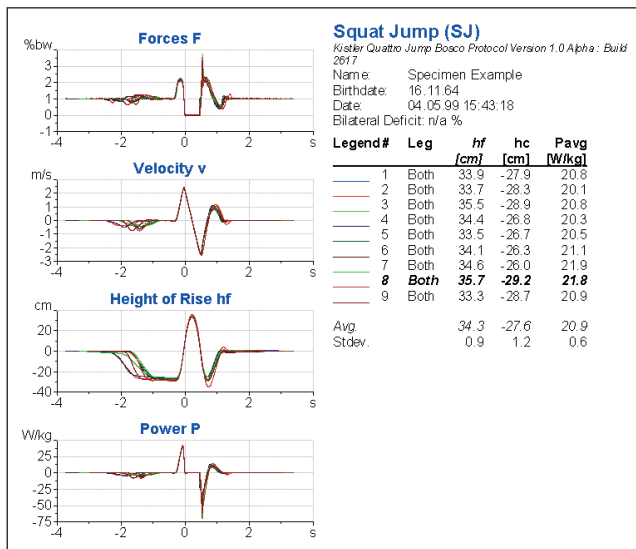

Important Parameters

- Force time curve F(t)
- Jump height (rise of center of gravity) hf
- Depth of countermovement
- Average Power Pavg
- % Fast Twitch Fibers (estimate) %FT
- Force at the transition from eccentric to concentric Fi
- Bosco Index
- Leg Equilibrium Index
- Speed/Endurance Index
- Effect of Prestretch
- Fatigue Parameters
- approximately 70 further Parameters

Dimensions

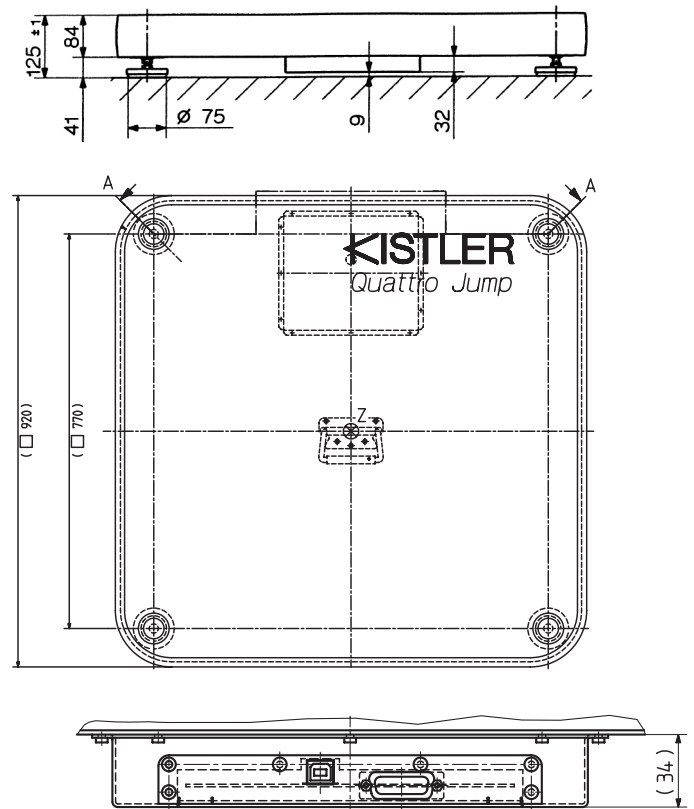

Bosco Test

The Bosco Protocol evaluates different types of «Squat Jump», «Countermovement Jump» and «Continuous Jump»:

Des.	Type of jump	No.	Description
SJ	Squat Jump	3 *	Single jump starting from knees bent at 90 degrees
SJbw	Squat Jump + Body Weight	3 *	Squat jump with additional load of up to one body weight
CMJ	Countermovement Jump	3 *	Single jump starting with straight legs with a natural flexion before takeoff
CJbref	Continuous Jump Bent Legs Ref.	5 *	Series of jumps with bent knees, used as reference to compare with CJb (15 ... 60 s)
CJs	Cont. Jump straight leg	5 *	Series of jumps with straight knees
CJb	Cont. Jump Bent Legs	15 ... 60 s	Series of 15 ... 60 s jumping with bent knees



* Recommended No. of jumps

9290B_003-025e-05.12

Jump Type Specific Bosco Protocols

For each jump type a variety of parameters is calculated and presented in a jump type specific protocol. This protocol can be customized by the user.

Examples:

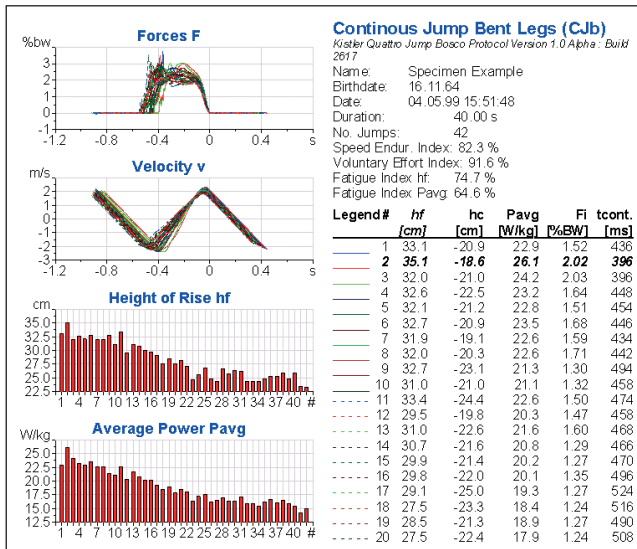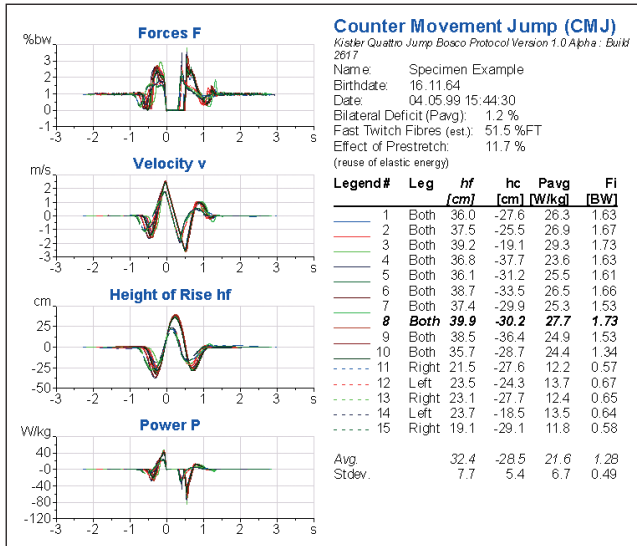

Summary Protocol

A summary protocol (also customizable) combines the most important parameters of an entire test. It also allows the comparison of different tests for instance within a team or over a certain time.

Jump Summary
 Kistler Quattro Jump Bosco Protocol Version 1.0 Alpha - Build 2617
 Date of Printout: 24.11.05 15:49:10
 Protocol Configuration File (MTC):

Squat Jumps (SJ and Sjbw)

#	Name	Date	hf SJ [cm]	hf Sjbw [cm]	Bosco Ind. [%]
1	Example, Specimen	04.05.99	35.7	24.3	68.1
Avg. Stdev.			35.7 / 0.0	24.3 / 0.0	68.1 / 0.0

Countermovement Jump (CMJ)

#	Name	Date	hf [cm]	Fi [%BW]	Pavg [W/kg]	Effect of Prestretch [%]	Fast Twitch Fibres [%FT]
1	Example, Specimen	04.05.99	39.9	1.73	27.7	11.7	51.5
Avg. Stdev.			39.9 / 0.0	1.73 / 0.00	27.7 / 0.0	11.7 / 0.0	51.5 / 0.0

Continuous Jump (CJs and CJbref)

#	Name	Date	hf [cm]	Pavg [W/kg]	k [kN/m]	hf [cm]	Pavg [W/kg]	Leg Equ. Index
1	Example, Specimen	04.05.99	29.7	34.5	29.75	38.9	24.2	1.43
Avg. Stdev.			29.7 / 0.0	34.5 / 0.0	29.75 / 0.00	38.9 / 0.0	24.2 / 0.0	1.43 / 0.00

Continuous Jump (CJb)

#	Name	Date	Speed Endur. Ind. [%]	Voluntary Effort Index [%]	Fatigue Index hf [%]	Fatigue Index Pavg [%]	hf [cm]	Pavg [W/kg]
1	Example, Specimen	04.05.99	82.3	91.6	74.7	64.6	32.0	22.4

Included Accessories

- Quattro Jump Software
- USB cable type A – type B

Type/Art. No.

2822A-01-0
55066002

Optional Accessories

- none

Ordering Code

- Quattro Jump
Portable force plate system

Type 9290BD

9290B_003-025e-05.12